# **POLY-CRETE SLB**





# **SYSTEM OVERVIEW**

**POLY-CRETE SLB** is a 100% solids, seamless 3/16" cementitious-urethane self-leveling flooring system with a flintshot quartz aggregate broadcast, providing a slip-resistant finish. The body coat is resistant to thermal shock and is moisture mitigating which can eliminate the use of a primer in most environments, while topcoat options offer a wide selection of chemical and abrasion resistant finishes.

## **FEATURES & BENEFITS**

# Self Leveling

A uniform, more even floor system

## Moisture Mitigating

Installs in more environments, including those with high moisture levels up to  $99\%\ RH$ 

#### · Non Slip

Texture from the aggregate broadcast aids in a safer floor, even when wet

#### Thermal Shock Resistant

Usable in harsh environments with high thermal cycling or rapid changes in temperature

# **COMMON USE SITES**

- Kitchens
- Warehouses
- High Traffic Areas
- Storage
- Light Manufacturing
- Food Processing
- Breweries / Distilleries
- Veterinary
- Kennels









# **COLORS**


Available in standard solid color topcoats. For a full list of available colors visit **DUR-A-FLEX.COM** 

#### **POLY-CRETE COLORS**



Poly-Crete MD, MDB, SLB, HF systems and Poly-Crete TF Plus topcoat feature a matte finish. For UV stability use with one of these topcoats: Accelera, Shop Floor, Armor Top, and Color-Fast.

\*Poly-Crete Color-Fast in these colors require a grout coat of Poly-Crete TF Plus to ensure consistent color.

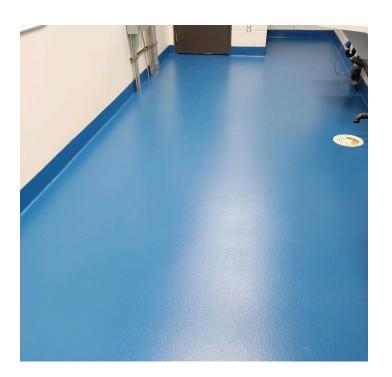

#### STANDARD COLORS



\*Not available in Armor Top



#### IMPORTANT!

Before using DUR-A-FLEX products, read and understand its accompanying Safety Data Sheet & Application Instructions for important safety information.

STANDARD TERMS AND CONDITIONS OF SALE. INCLUDING STANDARD WARRANTY APPLY - VISIT **DUR-A-FLEX.COM** FOR THE LATEST VERSION





<sup>&</sup>lt;sup>†</sup> Not available in Dur-A-Glaze #4 Field Pigment Packs